

芳纶蜂窝芯

产品规格

技术参数表

| 规格 | 孔径 (mm) | 密度 (kg/m ³) | 抗压强度 (MPa) | 纵向剪切强度 (MPa) | 横向剪切强度 (MPa) |
|------------------|------------|----------------------------|---------------|-----------------|-----------------|
| 工业级芳纶蜂窝 | | | | | |
| BHC1313-3.2-48 | 3.2 | 48 | 1.90 | 1.16 | 0.62 |
| BHC1313-3.2-64 | 3.2 | 64 | 3.10 | 1.48 | 0.82 |
| BHC1313-3.2-80 | 3.2 | 80 | 4.70 | 1.95 | 1.05 |
| BHC1313-3.2-96 | 3.2 | 96 | 6.60 | 2.45 | 1.42 |
| BHC1313-4.8-32 | 4.8 | 32 | 0.90 | 0.58 | 0.36 |
| BHC1313-4.8-48 | 4.8 | 48 | 2.60 | 0.98 | 0.56 |
| BHC1313-4.8-64 | 4.8 | 64 | 3.40 | 1.70 | 0.92 |
| BHC1313-4.8-80 | 4.8 | 80 | 6.00 | 1.95 | 1.10 |
| BHC1313-4.8-96 | 4.8 | 96 | 7.30 | 2.26 | 1.32 |
| BHC1313-6.4-24 | 6.4 | 24 | 0.54 | 0.34 | 0.18 |
| BHC1313-6.4-32 | 6.4 | 32 | 0.80 | 0.54 | 0.30 |
| BHC1313-6.4-48 | 6.4 | 48 | 2.05 | 1.00 | 1.56 |
| BHC1313-6.4-64 | 6.4 | 64 | 3.40 | 1.54 | 0.79 |
| BHC1313-9.5-24 | 9.5 | 24 | 0.52 | 0.32 | 0.16 |
| BHC1313-9.5-32 | 9.5 | 32 | 0.68 | 0.56 | 0.29 |
| BHC1313-9.5-48 | 9.5 | 48 | 9.60 | 1.15 | 0.66 |
| 航空级芳纶蜂窝 | | | | | |
| BHC1313A-3.2-48 | 3.2 | 48 | 2.00 | 1.26 | 0.72 |
| BHC1313A-3.2-64 | 3.2 | 64 | 3.20 | 1.58 | 0.92 |
| BHC1313A-3.2-80 | 3.2 | 80 | 4.80 | 2.05 | 1.15 |
| BHC1313A-3.2-96 | 3.2 | 96 | 6.70 | 2.55 | 1.52 |
| BHC1313A-3.2-128 | 3.2 | 128 | 11.40 | 3.05 | 1.88 |
| BHC1313A-3.2-144 | 3.2 | 144 | 13.30 | 3.15 | 2.00 |
| BHC1313A-4.8-32 | 4.8 | 32 | 1.00 | 0.68 | 0.46 |
| BHC1313A-4.8-48 | 4.8 | 48 | 2.70 | 1.08 | 0.66 |
| BHC1313A-6.4-48 | 6.4 | 48 | 2.15 | 1.10 | 0.66 |
| BHC1313A-9.5-48 | 9.5 | 48 | 9.70 | 1.25 | 0.76 |

BHC1313-工业级芳纶蜂窝
BHC1313A-航空级芳纶蜂窝

产品特性

- 质量轻度高, 抗疲劳
- 隔音、隔热、防潮、无毒
- 抗冲击性能好, 承载力高
- 阻燃、防火、外观平直
- 环保, 节约资源




苏州贝芯蜂窝科技有限公司

邮箱: info@beecore.com.cn
电话: +86 15962147106 (杨小姐) 18662499527 (刘小姐)
网址: www.beecore.com.cn



芳纶蜂窝芯

应用领域

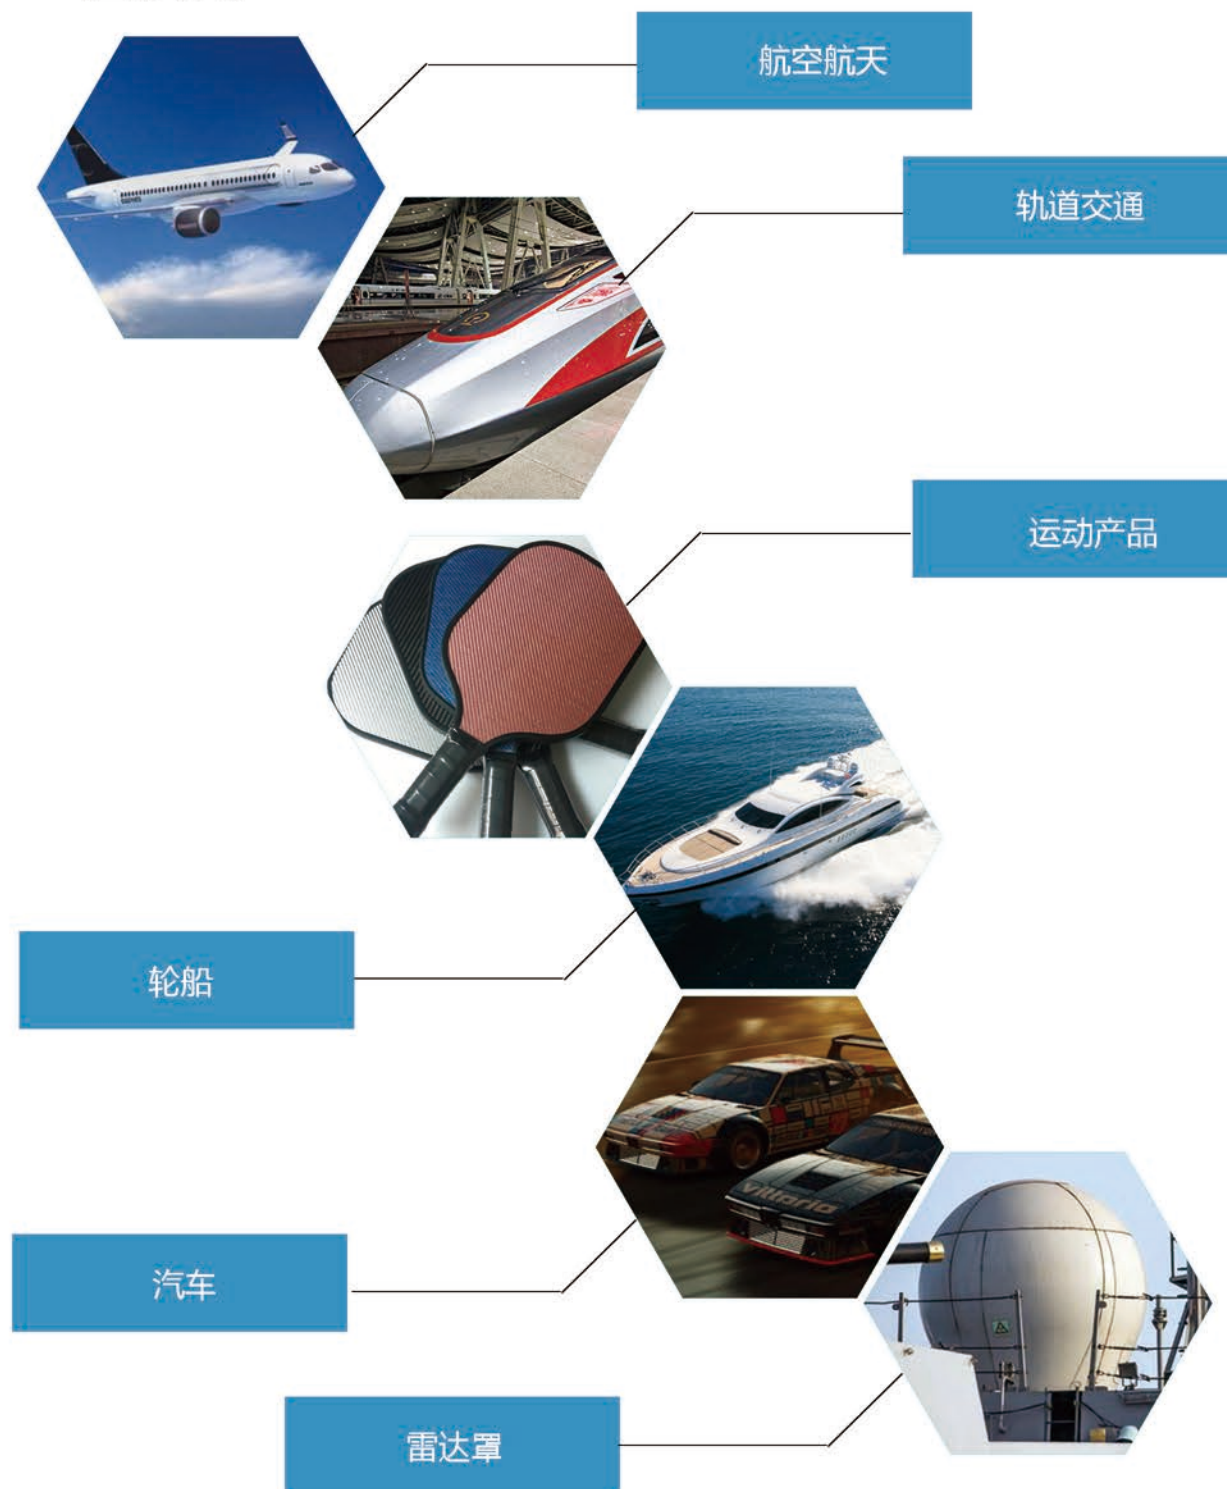

苏州贝芯蜂窝科技有限公司

邮箱: info@beecore.com.cn
电话: +86 18362561302 (李小姐)
网址: www.beecore.com.cn

